







CONDOR® CYCLE LOADER USER INSTRUCTION MANUAL

STOP! WARNING: READ THIS FIRST!

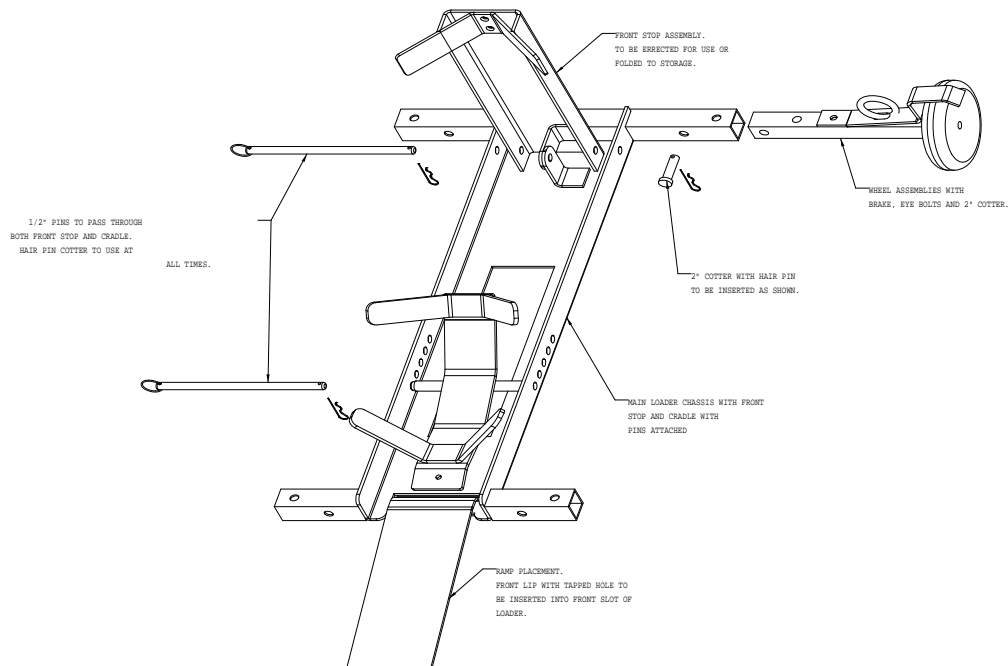
First Read and Understand the Instruction manual and product labels for important safety, set-up and troubleshooting information. If you have problems setting up or using the Condor® Cycle Loader, contact customer service @ 1-815-754-7418 or contact us via e-mail @ www.condor-lift.com. Condor® Cycle Loader is not intended for use by children.

Assembly Instructions: Remove all parts from shipping box. Check the parts below to make sure you have all the parts needed to assemble your Condor® Cycle Loader before beginning. In the unlikely event that you find a part damaged or missing, please call customer service @ #815-754-7418.

Condor® Pit-Stop Parts Packing list:

PICTURES OF PARTS	QUANTITY	PART DESCRIPTION
	1	Condor loader Main Unit
	4	Condor Loader Wheel Brake Assemblies
	1	Loader Ramp
	2	1/2 X 10" Front Stop pin with ring
	2	Hair Cotter 8 for 1/2 X10" pin
	1	Optional Velcro Strap (purchase separately)

Assembly Illustration:



User Instructions:

Confirm that the cradle is set in the optimized position setting (See **RECOMMENDED CRADLE SETTINGS**) for the entering tire and wheel. Adjustment of cradle is crucial for optimum retention. Optimum retention is achieved by trying different settings. (REFER TO CAUTION PARAGRAPH BELOW): If the optimum vertical support is achieved, the motorcycle will hold itself upright. If optimum retention is not achieved try different cradle settings. (REFER TO CAUTION PARAGRAPH BELOW). As an extra precaution, one may use the optional Velcro strap to strap the cradled wheel to the front stop (Optional Velcro strap purchased separately). Always strap Velcro through the wheel and around the front stop below the upper front stop flange. Once cradle is positioned, Place the Loader in front of the Motorcycle. Push or drive the motorcycle, centered into unit until the cradle of the Loader has fully engaged the wheel. Once the wheel is cradled, proceed to push further into the Loader until the wheel has engaged the front stop. If the optimum vertical support is achieved, the motorcycle will hold itself upright.

****Hook wench to 1/2" hook in front of Loader. Loosen the brakes and wench the Loader with motorcycle up the flat bed. For more information on use, refer to www.condor-lift.com.**

RECOMMENDED CRADLE SETTINGS:

The Condor® Cycle Loader is designed so that for every tire/wheel size within the ranges specified a minimum of 2 cradle settings be suitable. The optimum cradle setting for a specific tire would be, the setting that allows the cradle to tilt flush with the unit/ or 1/4" below the opening where the cradle sits. The 2nd optimum setting would be the setting forward from the optimum setting away from the entry direction. If less retention is desired at any time due to too much retention or sticking, the cradle may be moved away from the entry direction one notch.

RACING APPLICATIONS:

For bikes with GP or low durometer front tires compounds, use the 5th cradle setting from the entry directions.

CAUTION: Always make sure that all fasteners are tight and all pins are in place prior to use. Understand the limitations of this product and do not exceed these limitations. Always make sure that the unit's cradle settings are optimum for the tire size of the motorcycle before use. For Sportbikes or Motorcycles with low hanging chin fairings, fenders, and cowlings, the cradle may need to be turned 180 degrees for additional clearance, so as not to make contact with a low hanging chin fairing, fender or cowlings. For standard sportbike front wheel combinations, the 1,2,3, front settings may be suitable. If instructions are not clear, additional information is available at www.condor-lift.com or call 1-800-461-1344. Technical Components Development & Design is not responsible for any damage incurred by exceeding this product's limitations in structure and/or functionality.

One Year Limited Warranty:

This Condor® Cycle Loader product warranty extends to the original consumer purchaser of the product. All illustrations and specifications contained in this manual are based on the latest product information available at the time of printing. Technical Components Development & Design, Inc. reserves the right to make changes at any time, without notice, in color, materials, equipment, options, specifications and models. Models may be shown with optional equipment. Further information may be obtained by contacting Technical Components Development & Design, Inc. @ #1-815-754-7418.

Warranty Duration:

This product is warranted to the original consumer purchase for a period of one (1) Year from original purchase date.

What is not covered:

Our warranty for your product will not cover abnormal wear of parts, damage resulting from negligent use or misuse of the product, use contrary to operating instructions, or disassembly, repair or alteration by any person other than an authorized service station. We shall not be liable for any incidental or consequential damages for breach of by express or implied warranty on your product.

Return Policy:

15 day return policy applies. Merchandise may be returned within 15 days of purchase. Merchandise must be unused and in its original packaging. Customer pays for freight return. Credit is given upon inspection of returned goods. A 15 percent restocking fee applies to all returned merchandise.

How your state's law may apply:

Some states do not allow limitations on how long any implied warranty lasts or the exclusion or limitation of incidental or consequential damages. So the above limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which may vary from state to state.

Thank you for purchasing the Condor® Cycle Loader.

Condor is a registered trademark of Technical Components Development & Design, Inc.
The Condor® Cycle Loader is US Patented Number 6,575,310 & 6,648,300 & 6,935,619

Technical Components Development & Design, Inc.

Condor® Products

210 W. Stephanie Drive

Cortland, IL 60112

Phone: (815) 754-7418

Fax: (847) 273-0562

WebSite: www.condor-lift.com

